





PRIMER M82 Z

The M82Z primer is dedicated for initiation of propelling charges of types M3A1, M4A2, M119A1/2, M203, BMCS and others on all 155mm howitzers compatible with JBMoU.

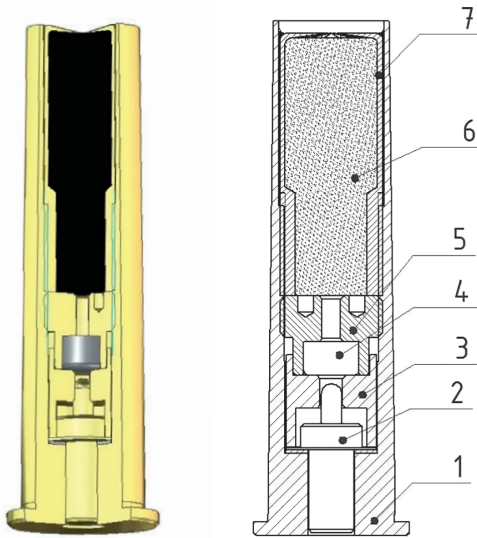

Legend:

- 1. cartridge
- 2. percussion
- 3. inlet
- 4. primer
- 5. cover
- 6. black powder
- 7. powder cover

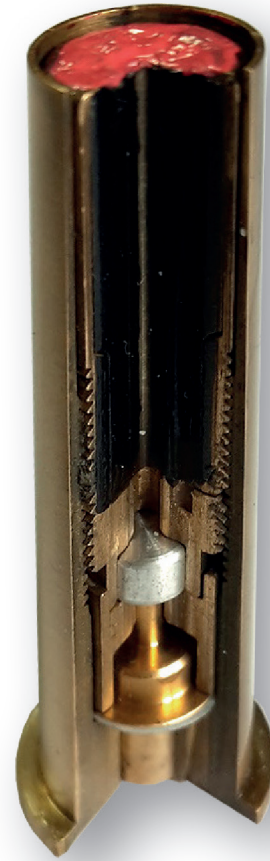

Technical data:

Total height:	50 mm	Sensitivity:	
Max. diameter :	Ø15,15 mm	Upper value:	Height ≥229 mm, Weight 458 g – 100%
Cartridge diameter:	Ø11,25 mm	Lower value:	Height ≤38 mm, weight 458 g – 0%
Total weight:	36 g		
Black powder weight:	1,2 g		
Max pressure:	≤ 450 MPa		
Operating temperature:	-46°C to 63°C		
Storing temperatures:	-54°C to 71°C		

PRIMER M82 Z

➤ IS DEDICATED FOR INITIATION OF PROPELLING CHARGES



➤ **MSM GROUP, s.r.o.**

Štúrova 925/27, 018 41 Dubnica nad Váhom, Slovak Republic
Reg No.: 46553509, VAT ID No.: 2023455577



www.msm.sk



člen
member of **CSG**
CZECHOSLOVAK GROUP